
Michael R. Pence, Governor Department of Natural Resources

POTENTIOMETRIC SURFACE MAP OF THE BEDROCK AQUIFERS OF CLINTON COUNTY, INDIANA

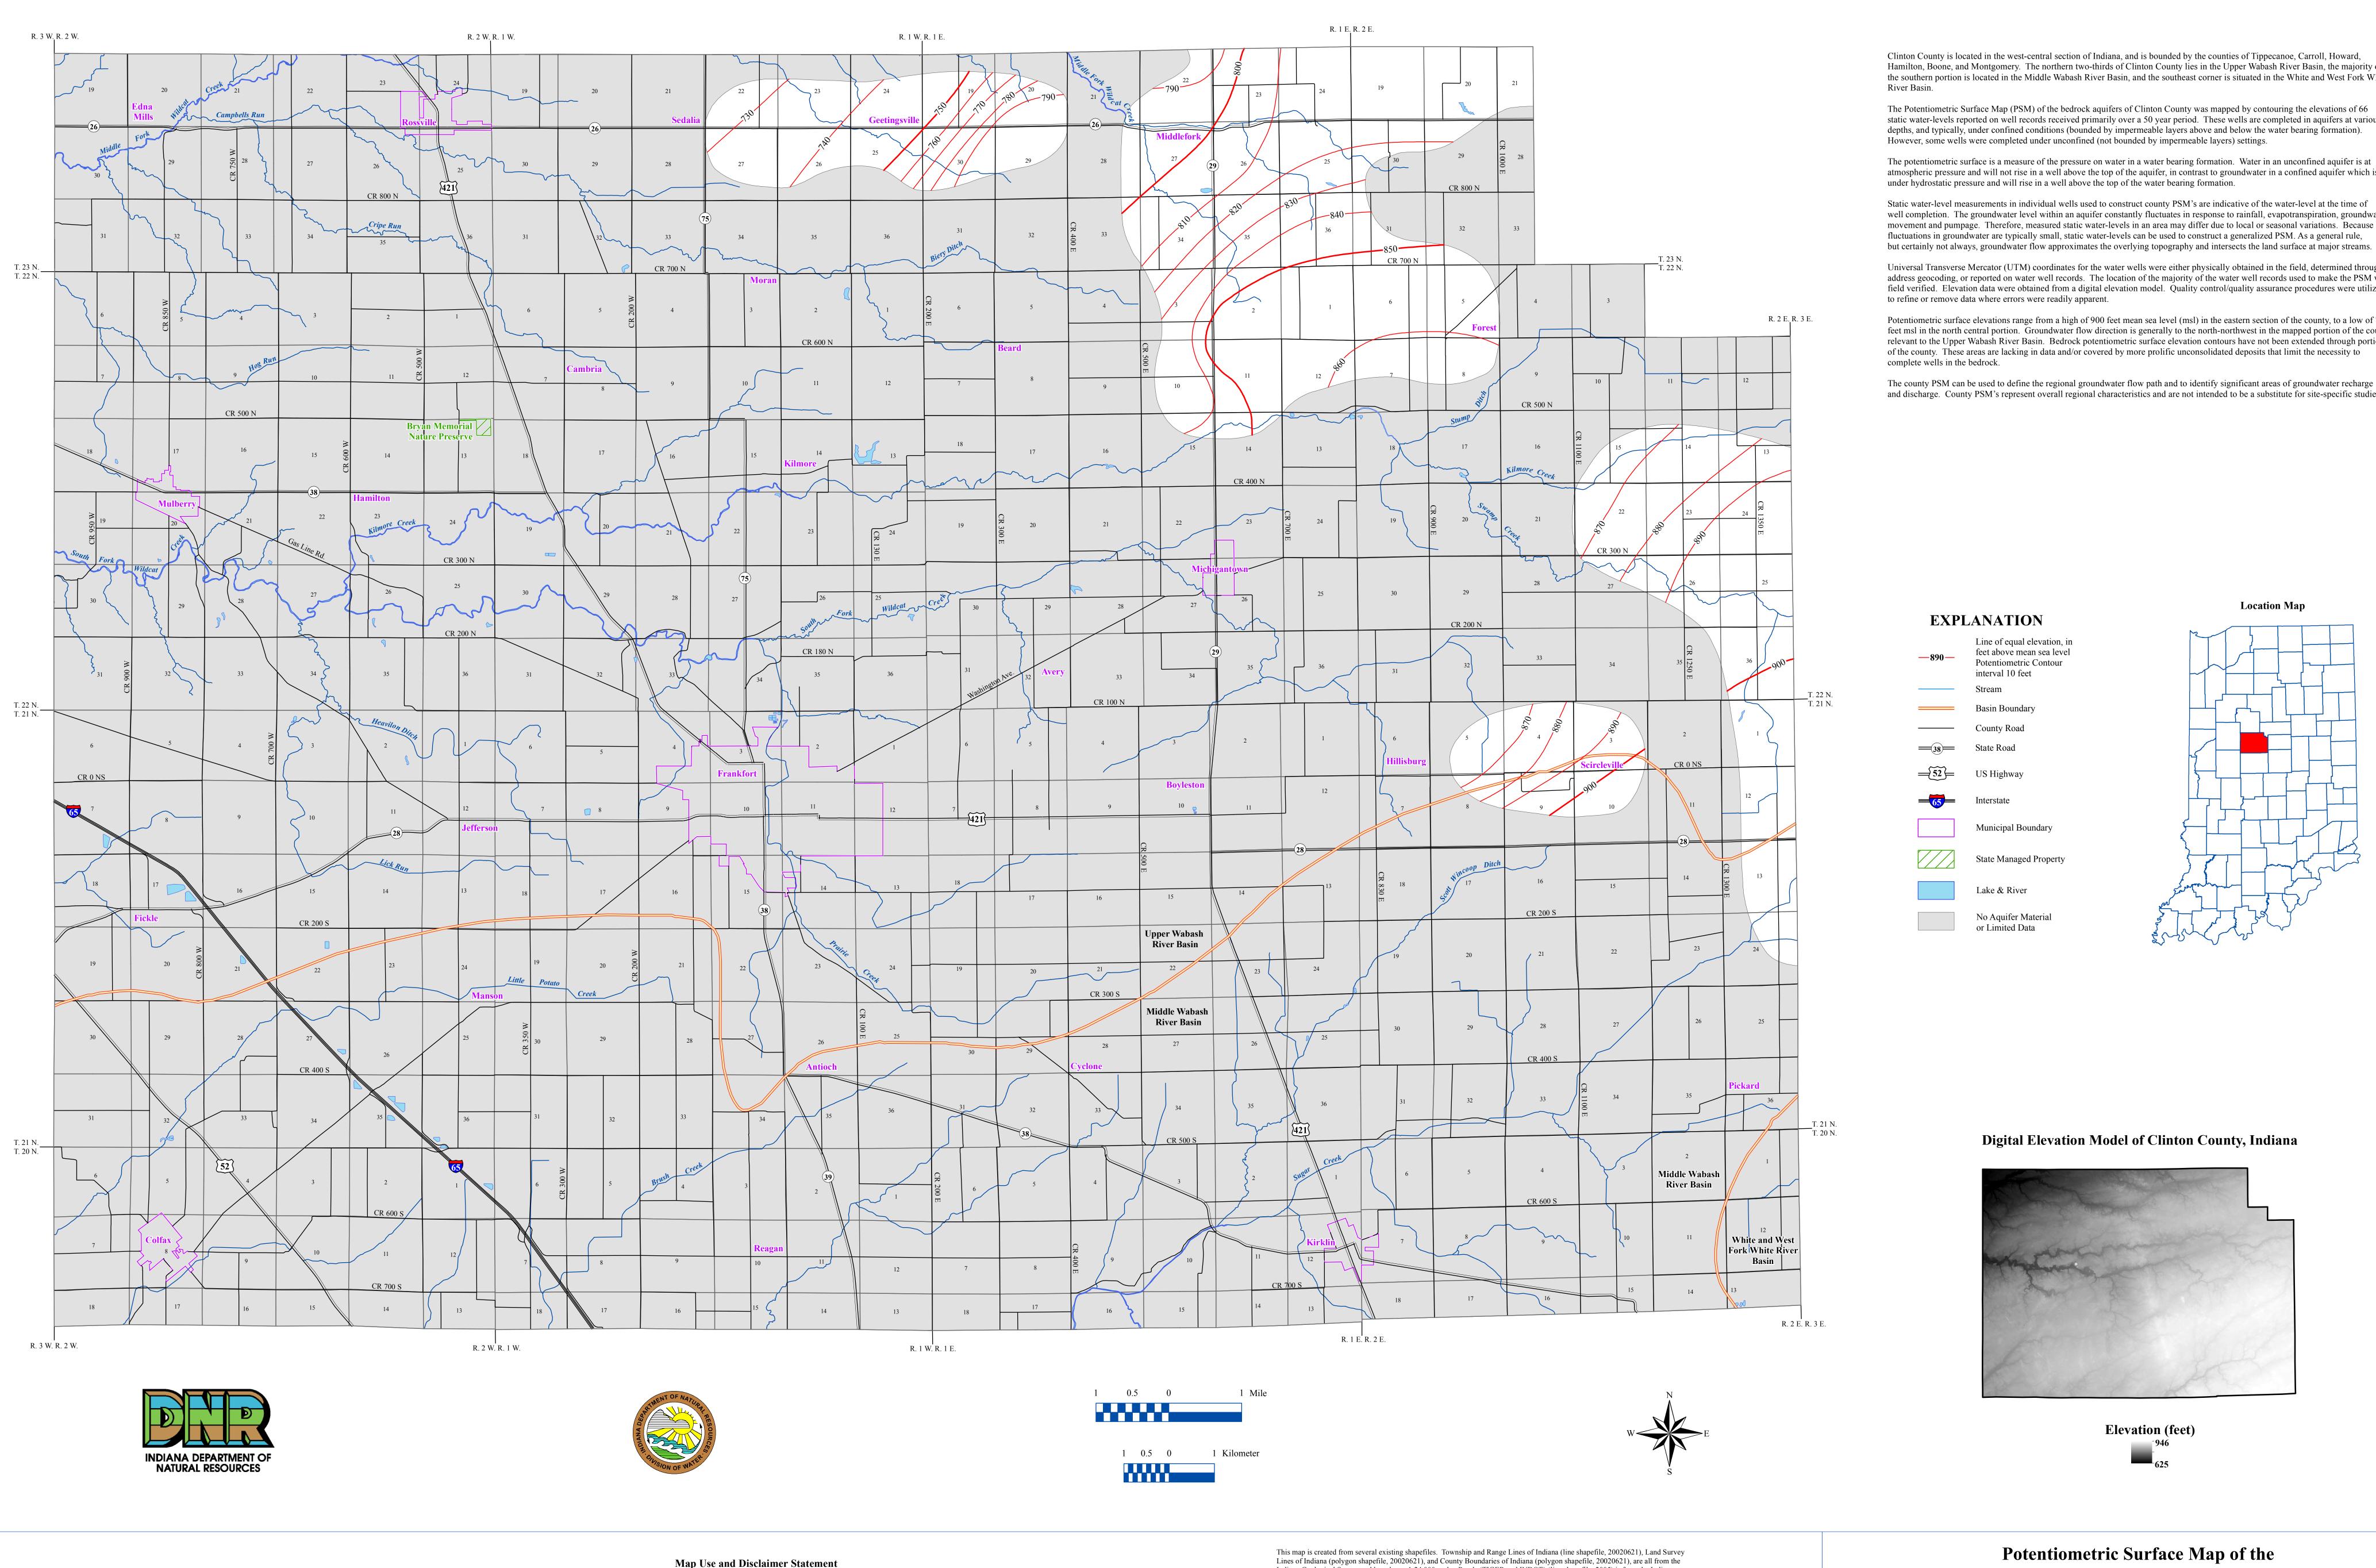

Clinton County is located in the west-central section of Indiana, and is bounded by the counties of Tippecanoe, Carroll, Howard, Hamilton, Boone, and Montgomery. The northern two-thirds of Clinton County lies in the Upper Wabash River Basin, the majority of the southern portion is located in the Middle Wabash River Basin, and the southeast corner is situated in the White and West Fork White

The Potentiometric Surface Map (PSM) of the bedrock aquifers of Clinton County was mapped by contouring the elevations of 66 static water-levels reported on well records received primarily over a 50 year period. These wells are completed in aquifers at various depths, and typically, under confined conditions (bounded by impermeable layers above and below the water bearing formation). However, some wells were completed under unconfined (not bounded by impermeable layers) settings.


The potentiometric surface is a measure of the pressure on water in a water bearing formation. Water in an unconfined aquifer is at atmospheric pressure and will not rise in a well above the top of the aquifer, in contrast to groundwater in a confined aquifer which is under hydrostatic pressure and will rise in a well above the top of the water bearing formation.

Static water-level measurements in individual wells used to construct county PSM's are indicative of the water-level at the time of well completion. The groundwater level within an aquifer constantly fluctuates in response to rainfall, evapotranspiration, groundwater movement and pumpage. Therefore, measured static water-levels in an area may differ due to local or seasonal variations. Because fluctuations in groundwater are typically small, static water-levels can be used to construct a generalized PSM. As a general rule,


Universal Transverse Mercator (UTM) coordinates for the water wells were either physically obtained in the field, determined through address geocoding, or reported on water well records. The location of the majority of the water well records used to make the PSM were field verified. Elevation data were obtained from a digital elevation model. Quality control/quality assurance procedures were utilized to refine or remove data where errors were readily apparent.

Potentiometric surface elevations range from a high of 900 feet mean sea level (msl) in the eastern section of the county, to a low of 730 feet msl in the north central portion. Groundwater flow direction is generally to the north-northwest in the mapped portion of the county, relevant to the Upper Wabash River Basin. Bedrock potentiometric surface elevation contours have not been extended through portions of the county. These areas are lacking in data and/or covered by more prolific unconsolidated deposits that limit the necessity to

The county PSM can be used to define the regional groundwater flow path and to identify significant areas of groundwater recharge and discharge. County PSM's represent overall regional characteristics and are not intended to be a substitute for site-specific studies.

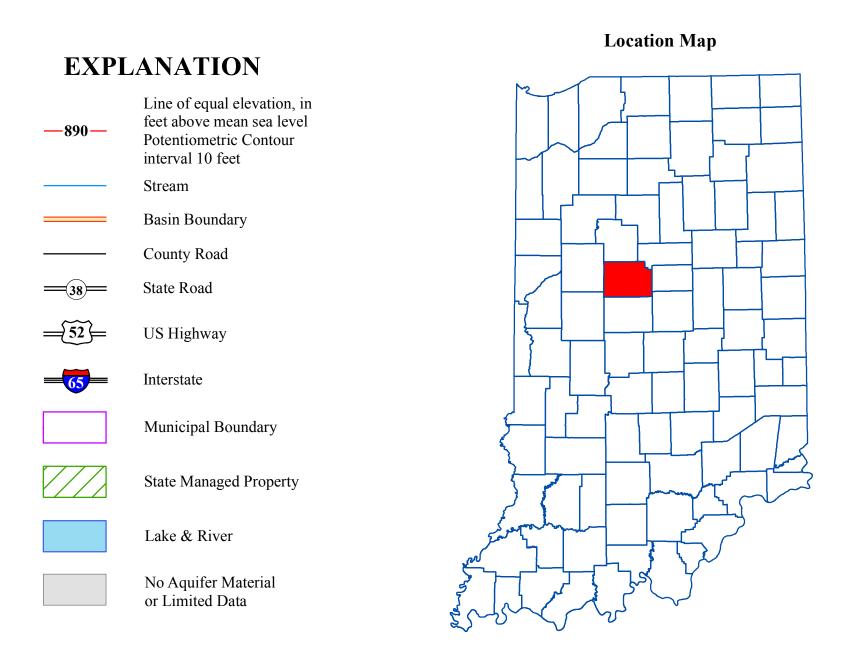

Digital Elevation Model of Clinton County, Indiana

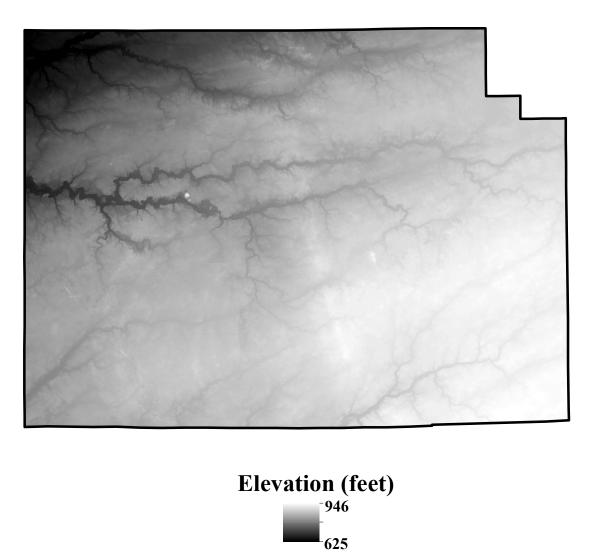

We request that the following agency be acknowledged in products derived from this map: Indiana Department of Natural Resources, Division of Water. This map was compiled by staff of the Indiana Department of Natural Resources, Division of Water using data believed to be reasonably accurate. However, a degree of error is inherent in all maps. This product is distributed "as is" without warranties of any kind, either expressed or implied. This map is intended for use only at the published scale.

Indiana Geological Survey and based on a 1:24,000 scale. Roads (TIGER and INDOT) (line shapefile, 2005) is from the Indiana Department of Transportation and based on a 1:100,000 scale. System1 (line shapefile, 2003) is from the Indiana Department of Transportation and based on a 1:24,000 scale. Incorporated Boundaries in Indiana (polygon shapefile, 20060501) is from the Graphics and Engineering Section, Indiana Department of Transportation. Hydrography, Streams (NHD) (line shapefile, 20081218), Rivers (NHD) (polygon shapefile, 20081218), and Lakes (NHD) (polygon shapefile, 20081218) are from the U.S. Geological Survey and based on a 1:24,000 scale. Basin boundaries are modified from the Watershed Boundary Dataset (polygon shapefile, 2008) from the Natural Resource Conservation Service and based on a 1:24,000 scale. Managed Lands IDNR IN (polygon shapefile, 20100920) is from the Indiana Department of Natural Resources and based on a 1:24,000 scale. Digital Elevation Model/Hillshade image is derived from the Indiana Ortho/LiDAR Statewide Collection Program (2011). Clinton County Bedrock No Aquifer Material or Limited Data (polygon shapefile, Schmidt, 2014) and Potentiometric Surface Contours of the Bedrock Aquifers of Clinton County, Indiana (line shapefile, Schmidt, 2014) are based on a 1:24,000 scale.

Potentiometric Surface Map of the **Bedrock Aquifers of Clinton County, Indiana**

Robert K. Schmidt Division of Water, Resource Assessment Section

October 2014

Map generated by Reuben Q. Arvin Indiana Department of Natural Resources, Division of Water, Resource Assessment Section