

UNCONSOLIDATED AQUIFER SYSTEMS OF KNOX COUNTY, INDIANA

The unconsolidated aquifer systems of Knox County are composed of sediments deposited by, or resulting from, a complex sequence of glacial, lacustrine, and post-glacial precipitation events. Nine unconsolidated aquifer systems have been mapped in Knox County: the Till Veneer, Alluvial, Lacustrine and Backwater Deposits, the Wabash Lowland Till, the Wabash Lowland Till Subsystem, the Wabash River and Tributaries Outwash, the Wabash River and Tributaries Outwash Subsystem, the White River and Tributaries Outwash, the White River and Tributaries Outwash Subsystem, and the Coal Mine Spoil. Because of the complicated glacial geology, boundaries of the aquifer systems in this county are commonly gradational and individual aquifers may extend across aquifer system boundaries. Approximately 35 percent of all wells in this county are completed in unconsolidated deposits.

The thickness of unconsolidated deposits in Knox County is quite variable due to the deposition of glacial material over an uneven bedrock surface. Unconsolidated deposits range from less than one foot thick northwest of Bicknell to over 210 feet thick north of Wills in Knox County.

Regional estimates of aquifer susceptibility to contamination from the surface can differ considerably due to a wide range of variation within geologic environments. In addition, man-made structures such as poorly constructed water wells, ungrouted or improperly abandoned wells, and open excavations can provide contaminant pathways that bypass the naturally protective clays.

Till Veneer Aquifer System

The Till Veneer Aquifer System occurs in areas where the unconsolidated material is predominantly thin till overlying bedrock. This system is chiefly the product of the deposition of glacial till over an uneven, eroded bedrock surface, and is generally less than 50 feet thick. This system has the most limited groundwater resources of all the unconsolidated aquifer systems in Knox County. Much of Knox County is mapped as Till Veneer Aquifer System.

Potential aquifers within the Till Veneer Aquifer System in Knox County include thin intertidal sand and/or gravel layers, and surficial sand and gravel outwash or alluvium. However, there is little potential for groundwater production in this system with 90 percent of the wells started in this system completed in the underlying bedrock. Wells producing from the Till Veneer Aquifer System have reported capacities of 2 to 7 gallons per minute (gpm) with static water levels ranging between 6 to 22 feet below the surface. The wells with reported capacities in the upper limits of this system have noted significant drawdowns. Some wells have been reported as "dry". There are no registered significant groundwater withdrawal facilities utilizing this system.

This system is generally not very susceptible to contamination from surface sources because of the low permeability of the near-surface material. However, there are areas where protective clay layers are thin or absent. These areas are very susceptible to contamination.

Alluvial, Lacustrine, and Backwater Deposits Aquifer System

The Alluvial, Lacustrine, and Backwater Deposits Aquifer System in Knox County is mapped within several wide floodplains along tributaries of the Wabash and White Rivers. This system consists of deposits resulting from glacial meltwater drainage, fine-grained glaciofluvial deposits formed in relatively static water, or coliforms from the surrounding upland areas.

About 55 percent of wells started in this system in Knox County are completed in the underlying bedrock aquifer system. However, the Alluvial, Lacustrine, and Backwater Deposits Aquifer System is capable of meeting the needs of some domestic users in Knox County. Individual sand and gravel units range from 1 to 25 feet thick with well depths ranging from 38 to 42 feet. Domestic well yields range from 5 to 12 gpm with static water levels ranging from 6 to 24 feet below the surface. The wells with reported capacities in the upper limits of this system have noted significant drawdowns. There are no registered significant groundwater withdrawal facilities using the Alluvial, Lacustrine, and Backwater Deposits Aquifer System in Knox County.

Thick deposits of clay that have a low susceptibility to surface contamination commonly characterize this aquifer system. However, the susceptibility is greater in areas where surficial clay deposits are thin and directly overlie sand and gravel deposits.

Wabash Lowland Till Aquifer System

The Wabash Lowland Till Aquifer System is mapped in the southeastern portion of Knox County. This aquifer system is up to 210 feet in thickness, and consists primarily of glacial till with intertidal sand and gravel layers. However, the sand and gravel aquifers in this system tend to be relatively discontinuous.

This aquifer system is capable of meeting the needs of domestic and some high-capacity users in Knox County. Individual sand and gravel units range from 8 to 30 feet thick with well depths ranging from about 14 to 100 feet. Domestic well yields range from 4 to 8 gpm with static water levels ranging from 2 to 42 feet below the surface. The higher yields are typically associated with significant drawdowns. There is one registered significant groundwater withdrawal facility (1 well) using the Wabash Lowland Till Aquifer System. The reported combined capacity of the facility is 97 gpm.

The Wabash Lowland Till Aquifer System typically has a low susceptibility to surface contamination because intertidal sand and gravel units are commonly overlain by thick glacial till.

Wabash Lowland Till Aquifer Subsystem

The Wabash Lowland Till Aquifer Subsystem is found in portions of northwest, south-central and southeastern Knox County. The subsystem is mapped similar to the Wabash Lowland Till Aquifer System. However, potential aquifer materials are generally thinner and potential yields are less in the subsystem.

About 70 percent of wells started in this subsystem in Knox County are completed in the underlying bedrock aquifer system. However, the Wabash Lowland Till Aquifer Subsystem is capable of meeting the needs of some domestic users in the county. Potential aquifer materials include relatively thin, discontinuous intertidal sand and gravel deposits. These intertidal sand and gravel aquifer materials are generally 5 to 10 feet thick. The wells producing from this subsystem are typically completed at depths ranging from 10 to 65 feet. Domestic well yields range from 3 to 10 gpm with static water levels ranging from 6 to 35 feet below the surface. The higher yields are typically associated with significant drawdowns. There are no registered significant groundwater withdrawal facilities utilizing this subsystem.

This subsystem is generally not very susceptible to surface contamination because intertidal sand and gravel units are overlain by thick till deposits. Wells producing from shallow aquifers are moderately to highly susceptible to contamination.

Wabash River and Tributaries Outwash Aquifer System / White River and Tributaries Outwash Aquifer System

The Wabash River and Tributaries Outwash Aquifer System occupies the valleys of the Wabash River and its major tributaries. Although the White River is a major tributary of the Wabash River, within the drainage basin of the White River this system is called the White River and Tributaries Outwash Aquifer System. These systems include thick glacial outwash sands and gravels, that are (in some areas) capped by a layer of clay and/or silt deposits.

The Wabash / White River and Tributaries Outwash aquifer systems are capable of meeting the needs of both domestic and high-capacity users in Knox County. The wells utilizing these aquifer systems are completed at depths ranging from 30 to 16 feet with sand and gravel aquifer materials commonly 18 to 62 feet thick. Domestic well yields are typically 10 to 50 gpm with static water levels ranging from 6 to 15 feet below the surface.

In the Wabash / White River and Tributaries Outwash aquifer systems there are 89 registered significant groundwater withdrawal facilities (148 wells) with yields that range up to 21,000 gpm. Also, there is one significant groundwater withdrawal facility with 2 radial collector well systems. The reported capacity for each of these collector wells is 10,000 gpm.

These aquifer systems are highly susceptible to surface contamination where sand and gravel deposits are near the surface and have little or no overlying clay deposits.

Wabash River and Tributaries Outwash Aquifer Subsystem / White River and Tributaries Outwash Aquifer Subsystem

These aquifer systems are generally located adjacent to the Wabash / White River and Tributaries Outwash aquifer systems. They typically occupy a higher topographic position and have considerably thinner (typically 6 to 28 feet thick) sand and gravel units than the main outwash aquifer systems. Commonly, the sand and gravel is covered by a layer of clay, till, lacustrine, or loess deposits with a typical thickness ranging from 10 to 20 feet.

The Wabash / White River and Tributaries Outwash aquifer subsystems are capable of meeting the needs of both domestic and high-capacity users in Knox County. The wells utilizing these aquifer systems are completed at depths ranging from 30 to 55 feet. Although not nearly as productive as their respective outwash systems, domestic wells completed in these subsystems typically yield 10 to 20 gpm. There are no registered significant groundwater withdrawal facilities (18 wells) using these systems in Knox County. High-capacity wells in these aquifer systems have reported rates ranging up to 650 gpm.




In general, these subsystems are moderately to highly susceptible to surface contamination. Although the overlying silt, clay, or till may provide some protection to the confined portions of these systems, in places such protection does not exist.

Coal Mine Spoil Aquifer System


The Coal Mine Spoil Aquifer System is present in the eastern portion of Knox County and covers about 5 percent of the county. The coal seams occur within the Carboniferous Group of Pennsylvanian age. This aquifer system was formed during the process of coal surface-mining methods. The overburden was typically broken up by blasting and moved aside to uncover the desired coal seam. The overburden, most of which was originally silted rock, became a heterogeneous mixture of particles ranging in size from clay to boulders. Where extensive, these spoil areas may contain considerable amounts of groundwater.

In Knox County, there are no reported wells producing from the Coal Mine Spoil Aquifer System. Wells started in this system are usually completed in bedrock. Information from surface coal mine and other sources indicate the quality of groundwater in this system is probably much poorer than in the overburden before mining took place. Typically, a significant increase in total dissolved solids, especially calcium, magnesium, bicarbonate, and sulfate occurs. High iron, and in places low pH, can severely limit potential uses of groundwater from this system.

Generally, it is expected that aquifers in coal mine spoil that are not graded and capped with compacted soil are highly susceptible to contaminants introduced at the surface. However, spoil aquifers in areas benefiting from modern reclamation methods are likely to be only moderately susceptible.

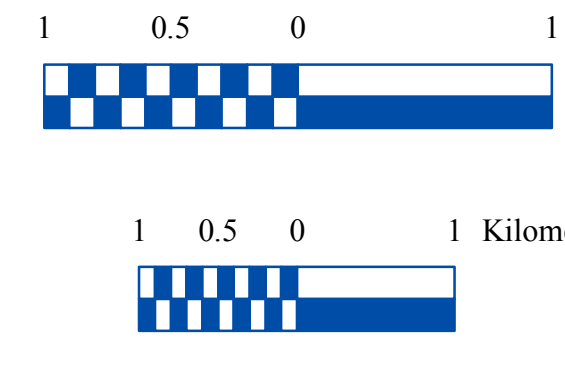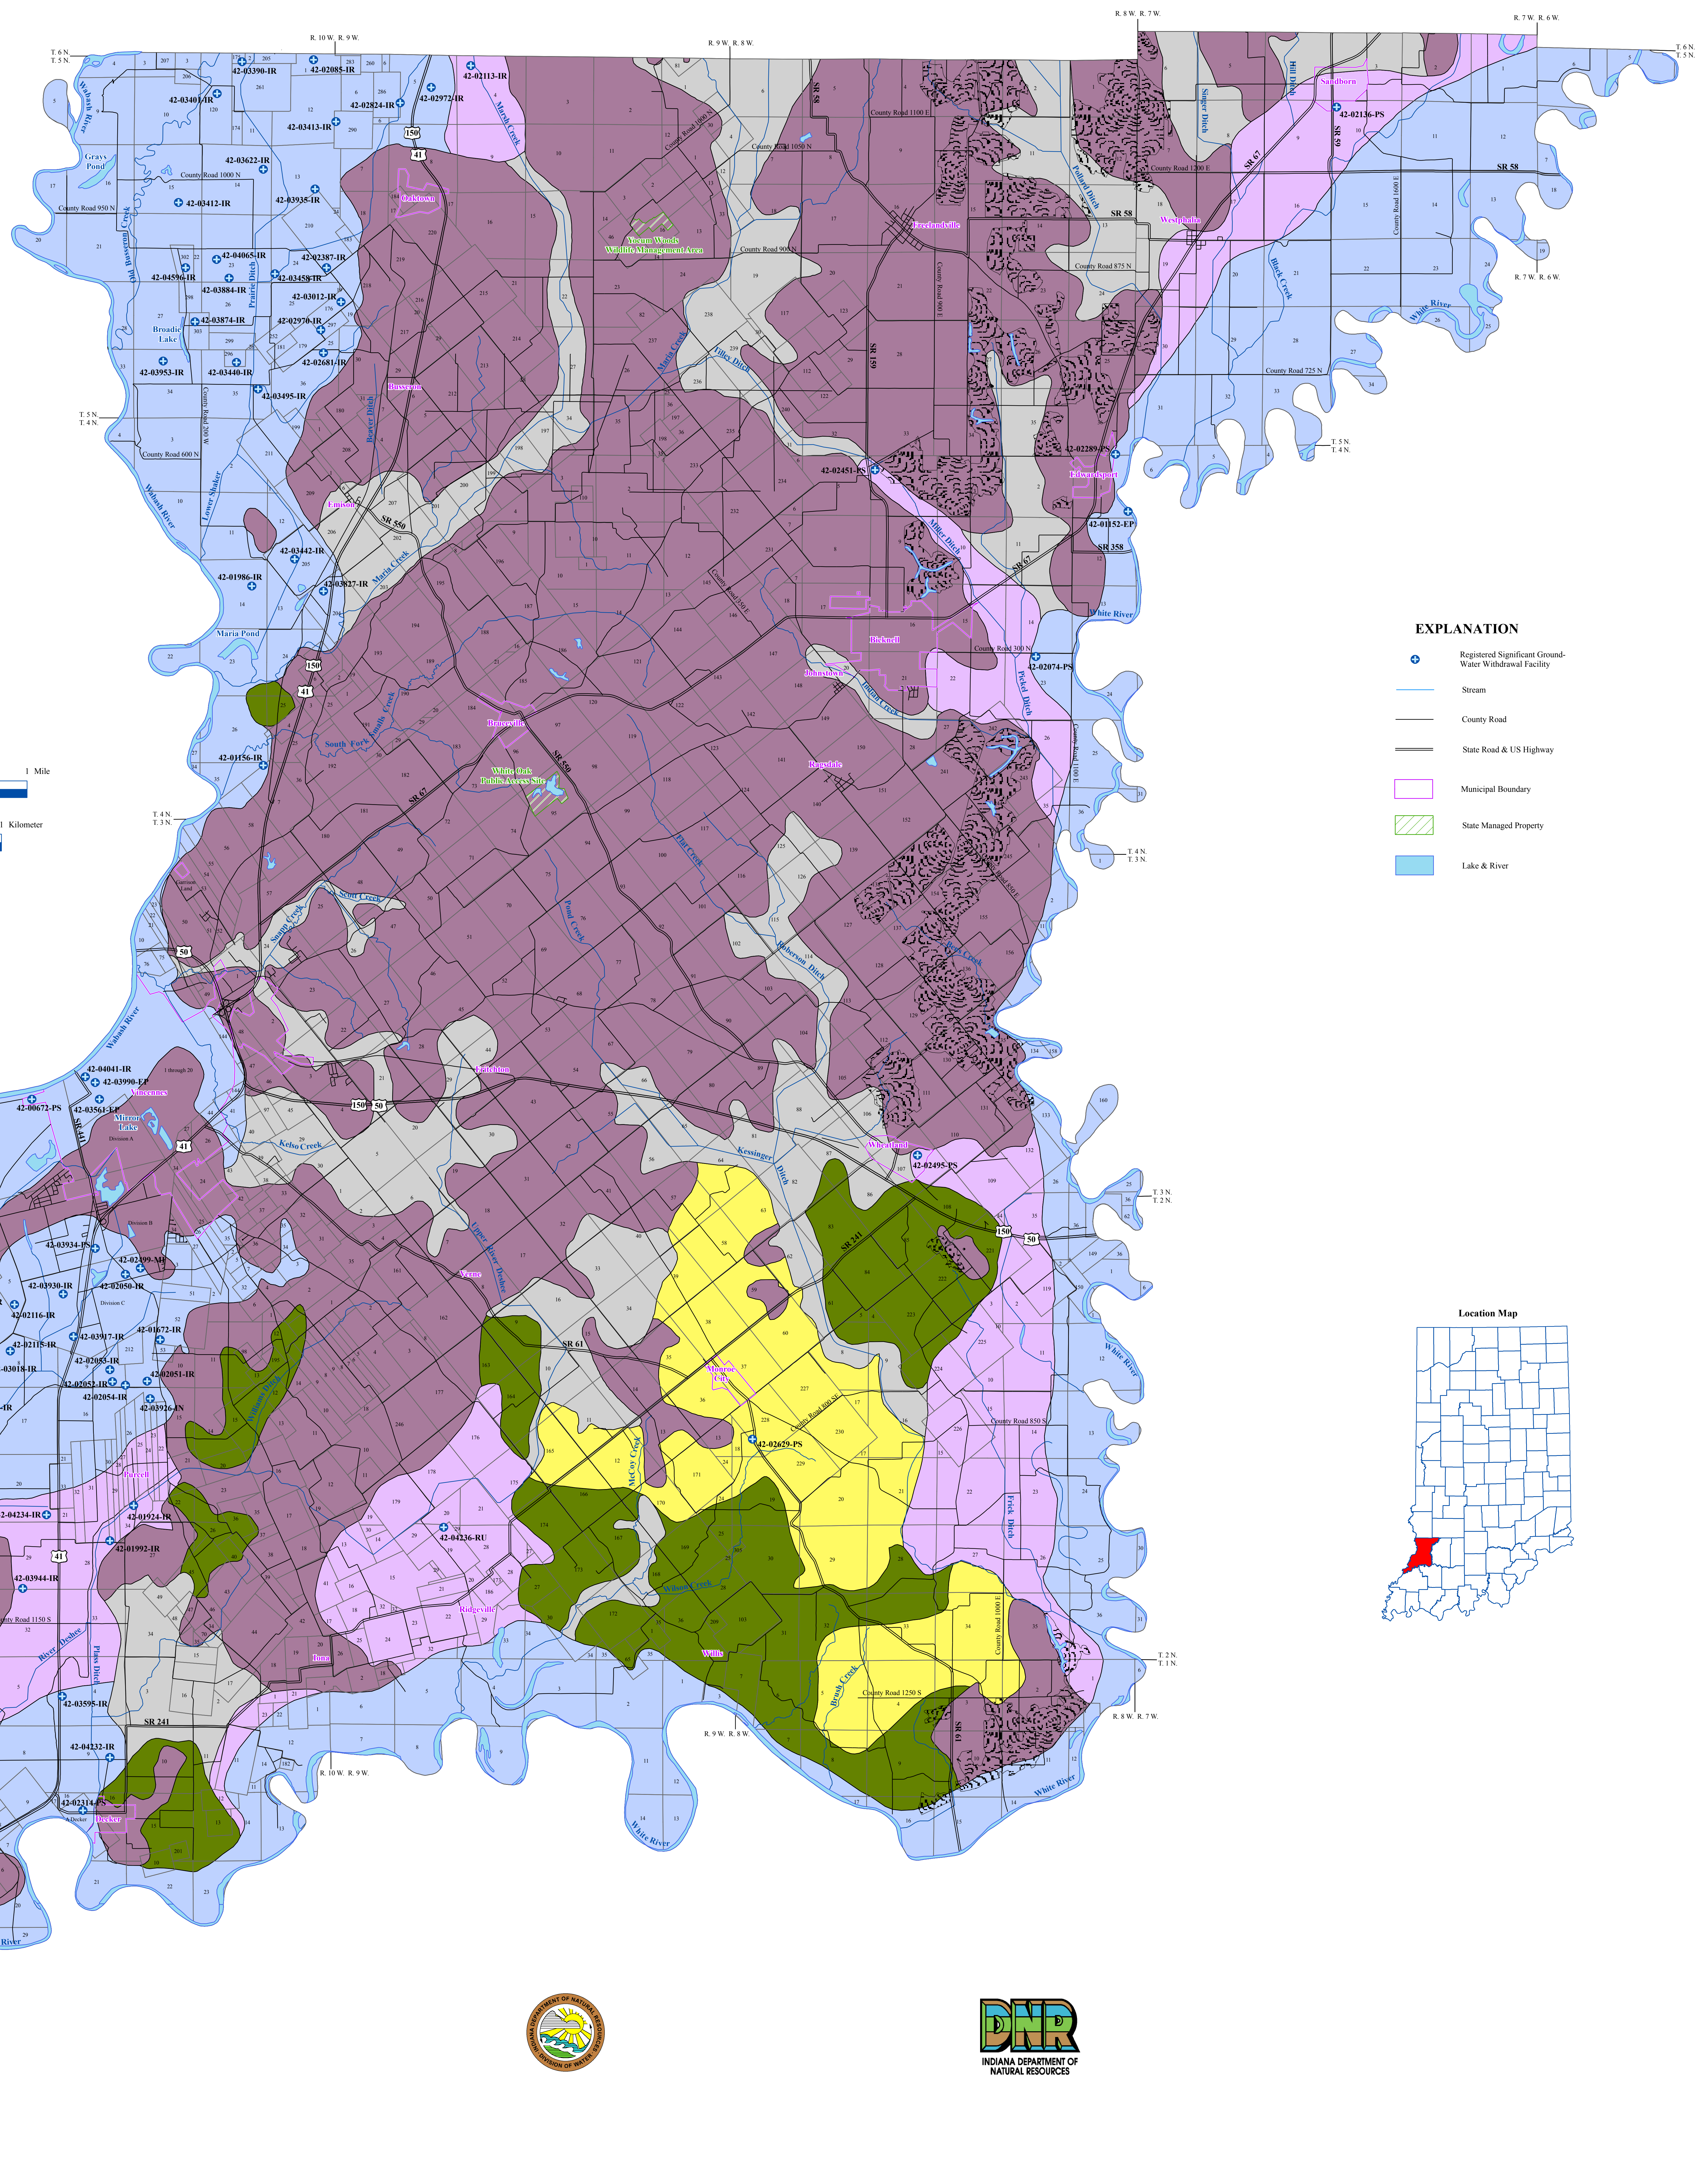

- EXPLANATION**
- Registered Significant Groundwater Withdrawal Facility
 - Stream
 - County Road
 - State Road & US Highway
 - Municipal Boundary
 - State Managed Property
 - Lake & River

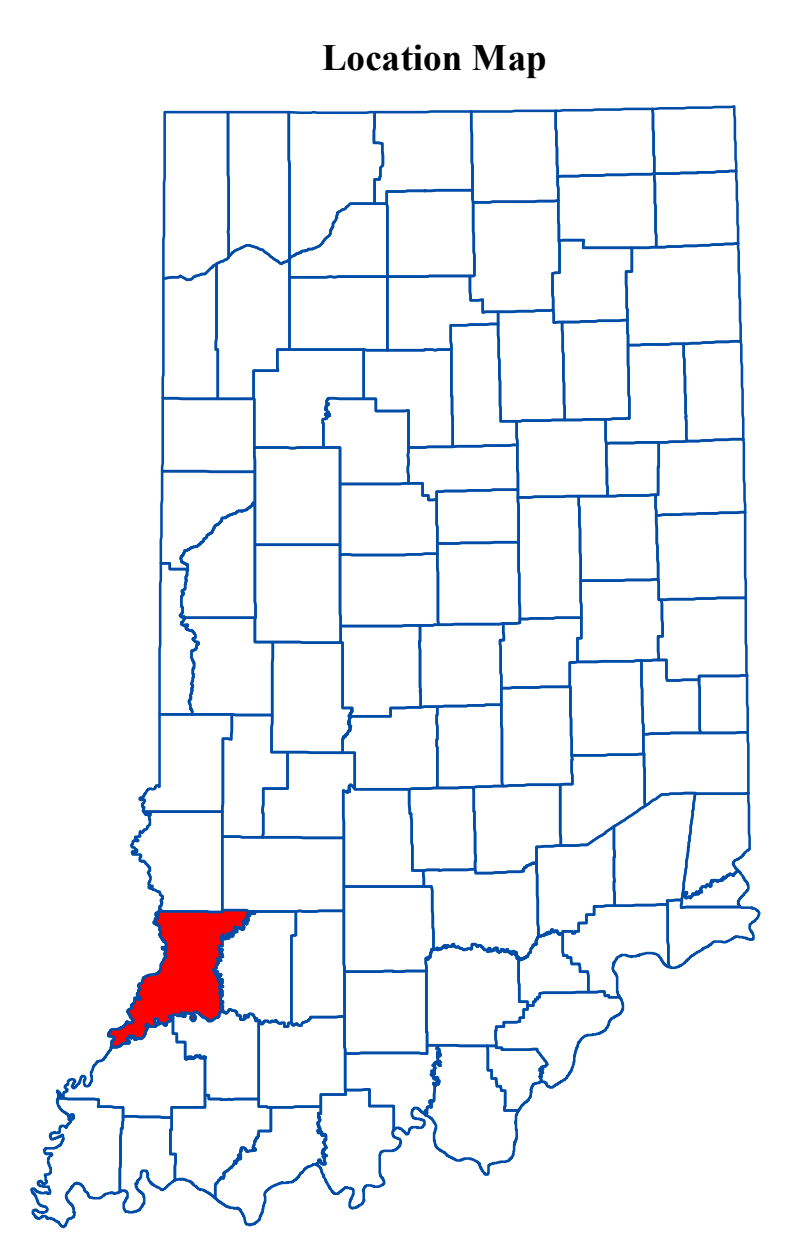

Map Use and Disclaimer Statement

We request that the following agency be acknowledged in products derived from this map: Indiana Department of Natural Resources, Division of Water. This map was compiled by staff of the Indiana Department of Natural Resources, Division of Water using data believed to be reasonably accurate. However, a degree of error is inherent in all maps. This product is distributed "as is" without warranties of any kind, either expressed or implied. This map is intended for use only at the published scale.

This map was created from several existing shapefiles: Township and Range Lines of Indiana (line shapefile, 20020621); Land Survey Lines of Indiana (polygon shapefile, 20020621); and County Boundaries of Indiana (polygon shapefile, 20020621). These files were from the Indiana Geological Survey and based on a 1:24,000 scale. Draft road shapefiles, System and System2 (line shapefiles, 2003), were from the Indiana Department of Transportation and based on a 1:24,000 scale. Population Area in Indiana 2000 (polygon shapefile, 20021000) was from the U.S. Census Bureau and based on a 1:100,000 scale. Stream2 (line shapefile, 20000420) was from the Center for Advanced Applications in GIS at Purdue University. Managed Areas 96 (polygon shapefile, various dates) was from INDR. Unconsolidated aquifer systems coverage (Grove and Scott, 2011) was based on a 1:24,000 scale.

Unconsolidated Aquifer Systems of Knox County, Indiana

by
Glenn E. Grove and Robert A. Scott
Division of Water, Resource Assessment Section

March 2011

Map created by Scott H. Dean
INDR, Division of Water, Resource Assessment Section