



**GENERAL NOTES**

- ① 360 kg/m<sup>2</sup> bituminous mixture for patching required. Width of patch to be equal to width of bituminous shoulder in place.
- ② For pavement grades of 1% or steeper.
- ③ For pavement grades of flatter than 1%.

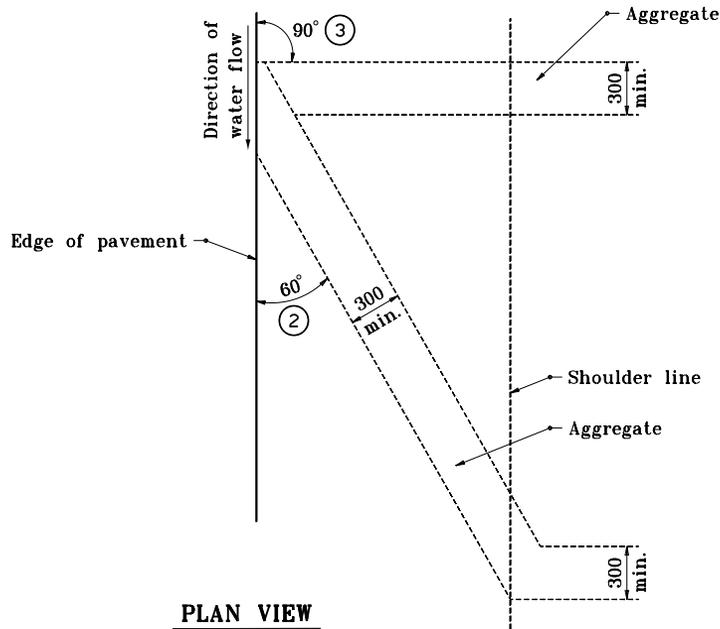

**PLAN VIEW**

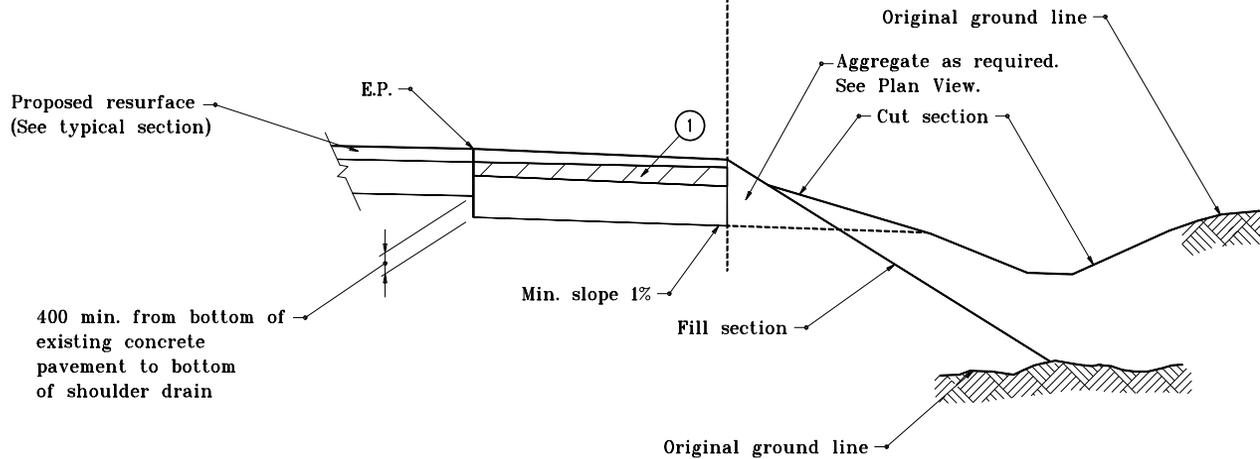

**ELEVATION**

**SHOULDER DRAIN**


All dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION

**SHOULDER DRAIN**

JUNE 1996

STANDARD DRAWING NO. 303-SHDR-01



/s/ Anthony L. Uremovich 6-03-96  
DESIGN STANDARDS ENGINEER DATE

/s/ Donald W. Lucas 6-03-96  
CHIEF HIGHWAY ENGINEER DATE

Source Sheet: NONE

DESIGN STANDARDS ENGINEER