


USED FOR RESIDENCES, BARNS, PRIVATE GARAGES, ETC.

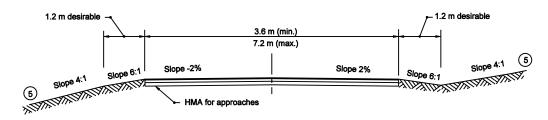

SECTION S-S

NOTES:

- The driveway detailed on this sheet shall be used under the following conditions:
 - the mainline shoulder is paved and is less than 2.4 m in width
 - the mainline shoulder is not paved
- If the driveway surface is unimproved cross section as for driveway Class V can be used in place of Section S-S, see Drawing 610-DRIV-11 for details.
- See Standard Drawing 610-DRIV-07 for General Notes.
- See Standard Drawing 610-DRIV-06 for Sections A-A and B-B.

LEGEND

- M Limits of HMA for approaches
- P Limits of compacted aggregate base
- S Equivalent to surface in place

Width variable

90 kg/m² HMA Surface Type A on 150 kg/m² HMA Intermediate Type A on 200 mm compacted aggregate base #53

HMA FOR APPROACHES

TYPICAL SECTION

All Dimension are in mm unless otherwise specfied

INDIANA DEPARTMENT OF TRANSPORTATION

CLASS II DRIVE

MARCH 2003

STANDARD DRAWING NO. 610-DRIV-04



/s/ Richard L. VanCleave
DESIGN STANDARDS ENGINEER

/s/ Richard K.Smutzer 3-03-03
CHIEF HIGHWAY ENGINEER DATE

3-03-03

DESIGN STANDARDS ENGINEER