



GENERAL NOTES


- ① S = Normal width of paved shoulder as shown on plans.
- ② See plans for W
- 3. Mailbox approach pavement section shall be the same as the shoulder material.
- 4. High speed is defined as 80 km/h or greater.

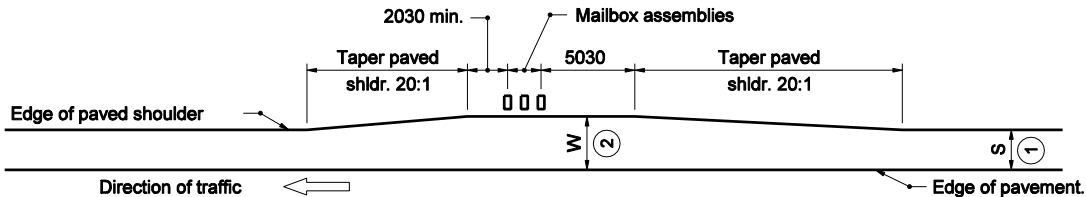

TYPICAL MAILBOX APPROACH

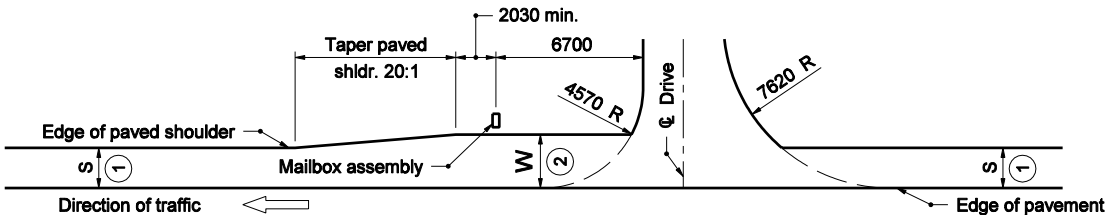

**COMBINATION MAILBOX APPROACH & DRIVE
(Mailbox located beyond drive)**

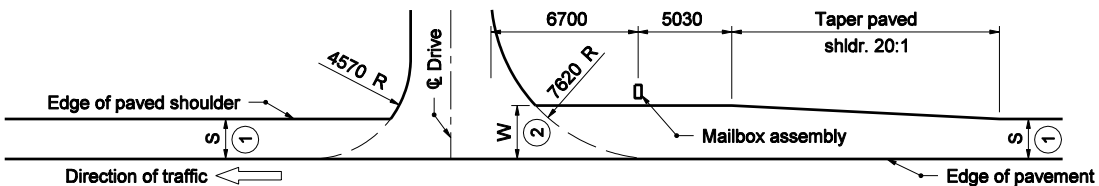

**COMBINATION MAILBOX APPROACH & DRIVE
(Mailbox located beyond drive)**


All dimensions are in mm unless otherwise specified

INDIANA DEPARTMENT OF TRANSPORTATION

**MAILBOX APPROACHES
HIGH SPEED TRAFFIC**

MARCH 2005

STANDARD DRAWING NO. 610-MBAP-01



/s/ Richard L. VanCleave 3-01-05
DESIGN STANDARDS ENGINEER DATE

/s/ Richard K. Smutzer 3-01-05
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER