


STREET OR ALLEY APPROACH WITH HMA MAINLINE PAVEMENT

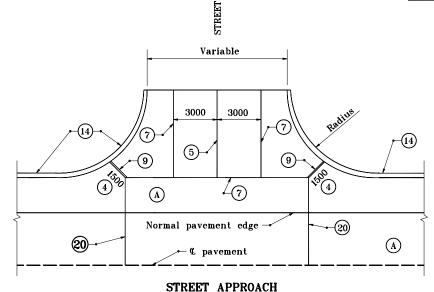

WITH PCCP MAINLINE PAVEMENT

GENERAL NOTES

- Radii of 7600 at minor cross streets shall be provided on new construction and on reconstruction where space permits.
- Radii of 9200 or more at major cross streets shall be provided where feasible so that a truck may turn without encroachment.
- Radii of 12200 or more at major cross streets shall be provided where trucks and buses repeatedly turn.
- (4) Ear construction type B permitted as shown on Standard Drawing 605-ERCN-02.

LEGEND

- (A) PCCP
- (5) Longitudinal joint
- (7) Keyway joint
- (9) 30 preformed joint filler
- (10) 10 preformed joint filler
- (14) Integral concrete curb
- (15) Combined curb and gutter
- (20) Contraction joint

All dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION

STREET or ALLEY APPROACH

JANUARY 2000

STANDARD DRAWING NO. 610-PRAP-13



/s/ Anthony L. Uremovich 1-03-00
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 1-03-00

POTON CTANDADOS PNOTNERD