


NOTE:

- ① Construct safety edge as required for Surface and Intermediate layers at edge of pavement.

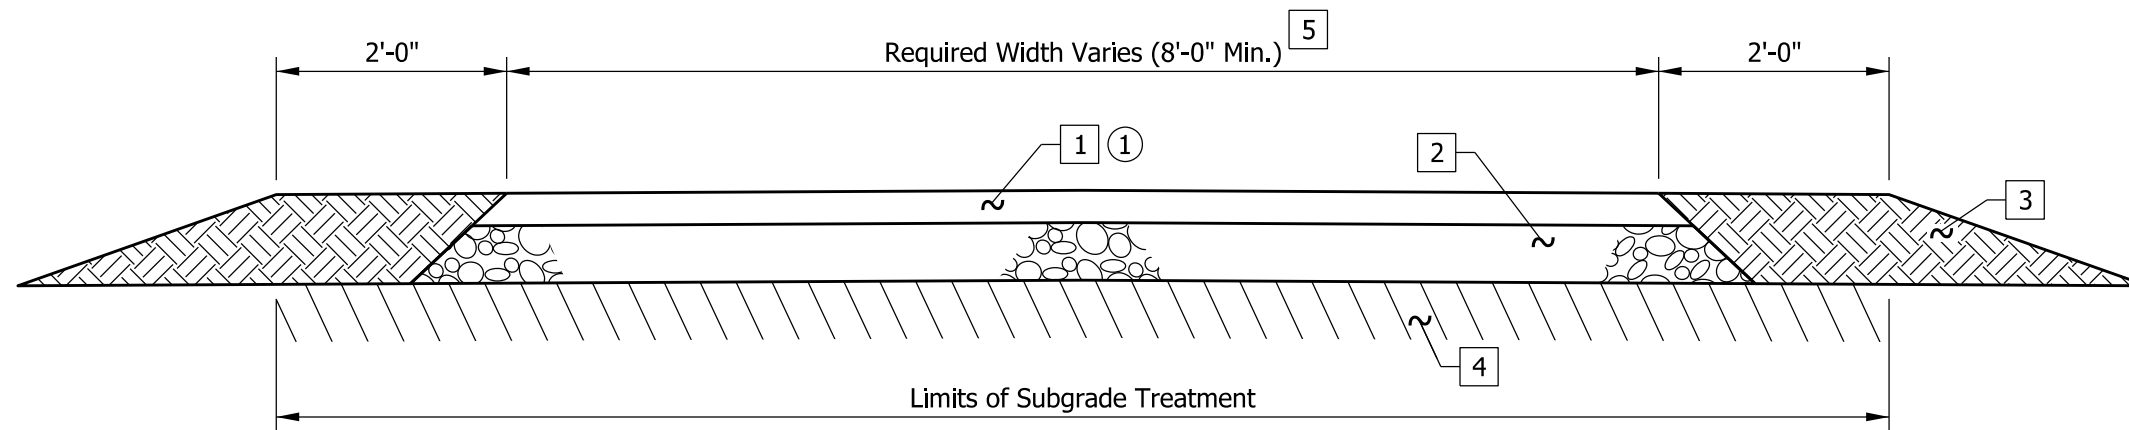

LEGEND


- ① HMA for Sidewalk Consisting of
140 lb/yd² HMA Surface, Type B, on
220 lb/yd² HMA Intermediate, Type B
- ② 6" Compacted Aggregate No. 53, Base
- ③ Earth Shoulder
- ④ Subgrade Treatment Type III, 6" of Soil
Compacted to the Density and Moisture Requirement
- ⑤ Width and Cross Slope as Required

INDIANA DEPARTMENT OF TRANSPORTATION

NON-MOTORIZED VEHICLE USE FACILITY
HMA PAVEMENT SECTION

SEPTEMBER 2017

STANDARD DRAWING NO. E 604-NVUF-01




/s/ Elizabeth W. Phillips 04/27/17
DESIGN STANDARDS ENGINEER DATE

/s/ John Leckie 04/28/17
CHIEF ENGINEER DATE

NOTE:

- ① Construct safety edge as required for Surface and Intermediate layers at edge of pavement.

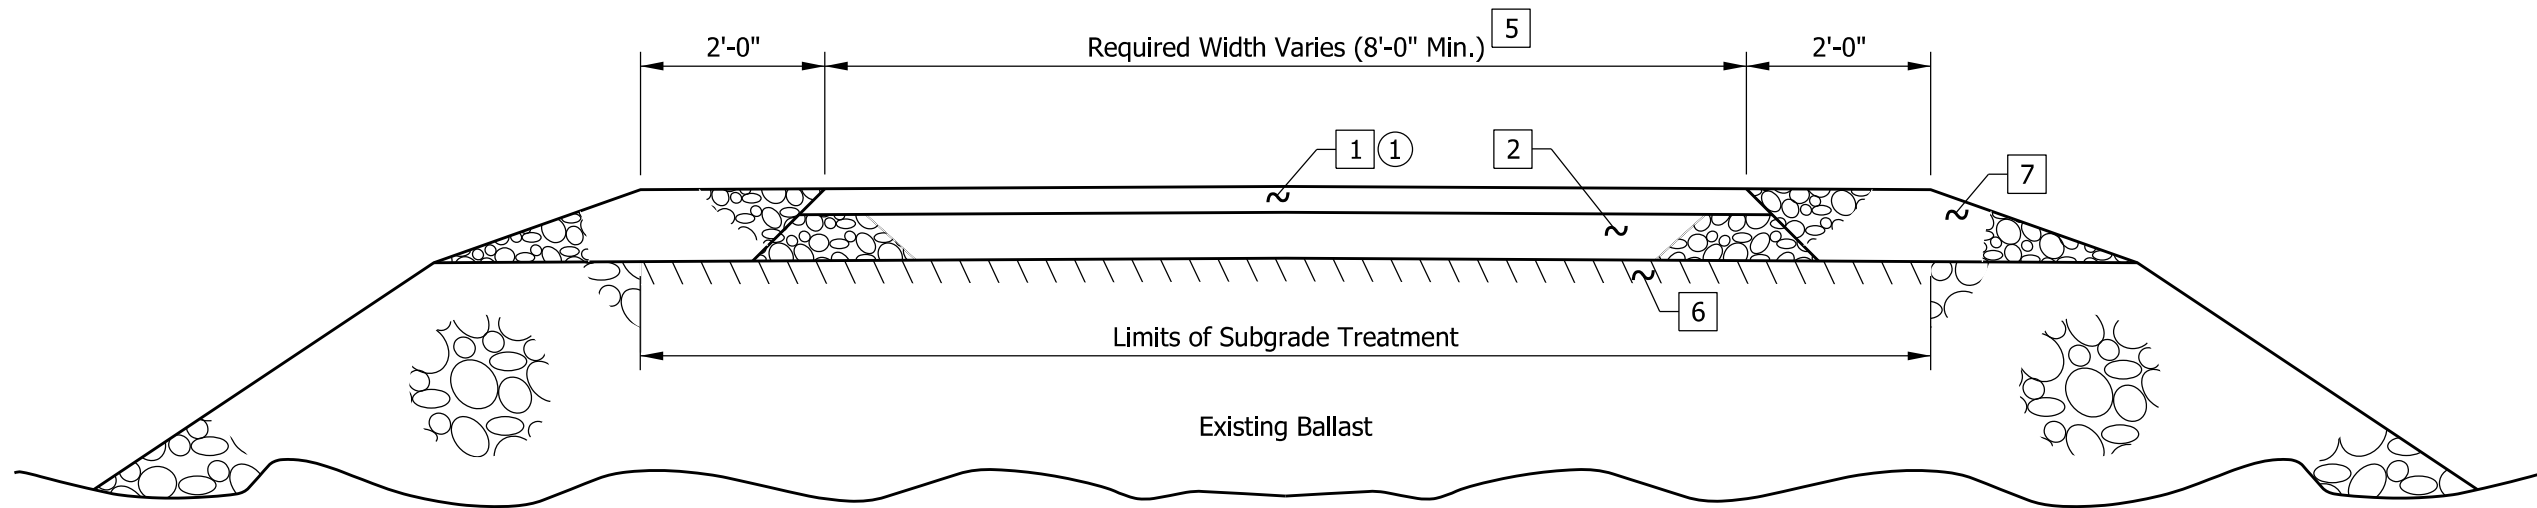


LEGEND

- 1 HMA for Sidewalk Consisting of 140 lb/yd² HMA Surface, Type B, on 220 lb/yd² HMA Intermediate, Type B
- 2 6\"/>
- 5 Width and Cross Slope as Required
- 6 Subgrade Treatment Type V, 3\"/>
- 7 Variable-Depth Compacted Aggregate No. 53 or No. 73

INDIANA DEPARTMENT OF TRANSPORTATION

NON-MOTORIZED VEHICLE USE FACILITY
HMA PAVEMENT SECTION
ON ABANDONED RAILROAD CORRIDOR
SEPTEMBER 2017

STANDARD DRAWING NO. E 604-NVUF-02



/s/ Elizabeth W. Phillips 04/27/17
DESIGN STANDARDS ENGINEER DATE

/s/ John Leckie 04/28/17
CHIEF ENGINEER DATE