
Cameron F. Clark, Director

## POTENTIOMETRIC SURFACE MAP OF THE UNCONSOLIDATED AQUIFERS OF DEARBORN COUNTY, INDIANA

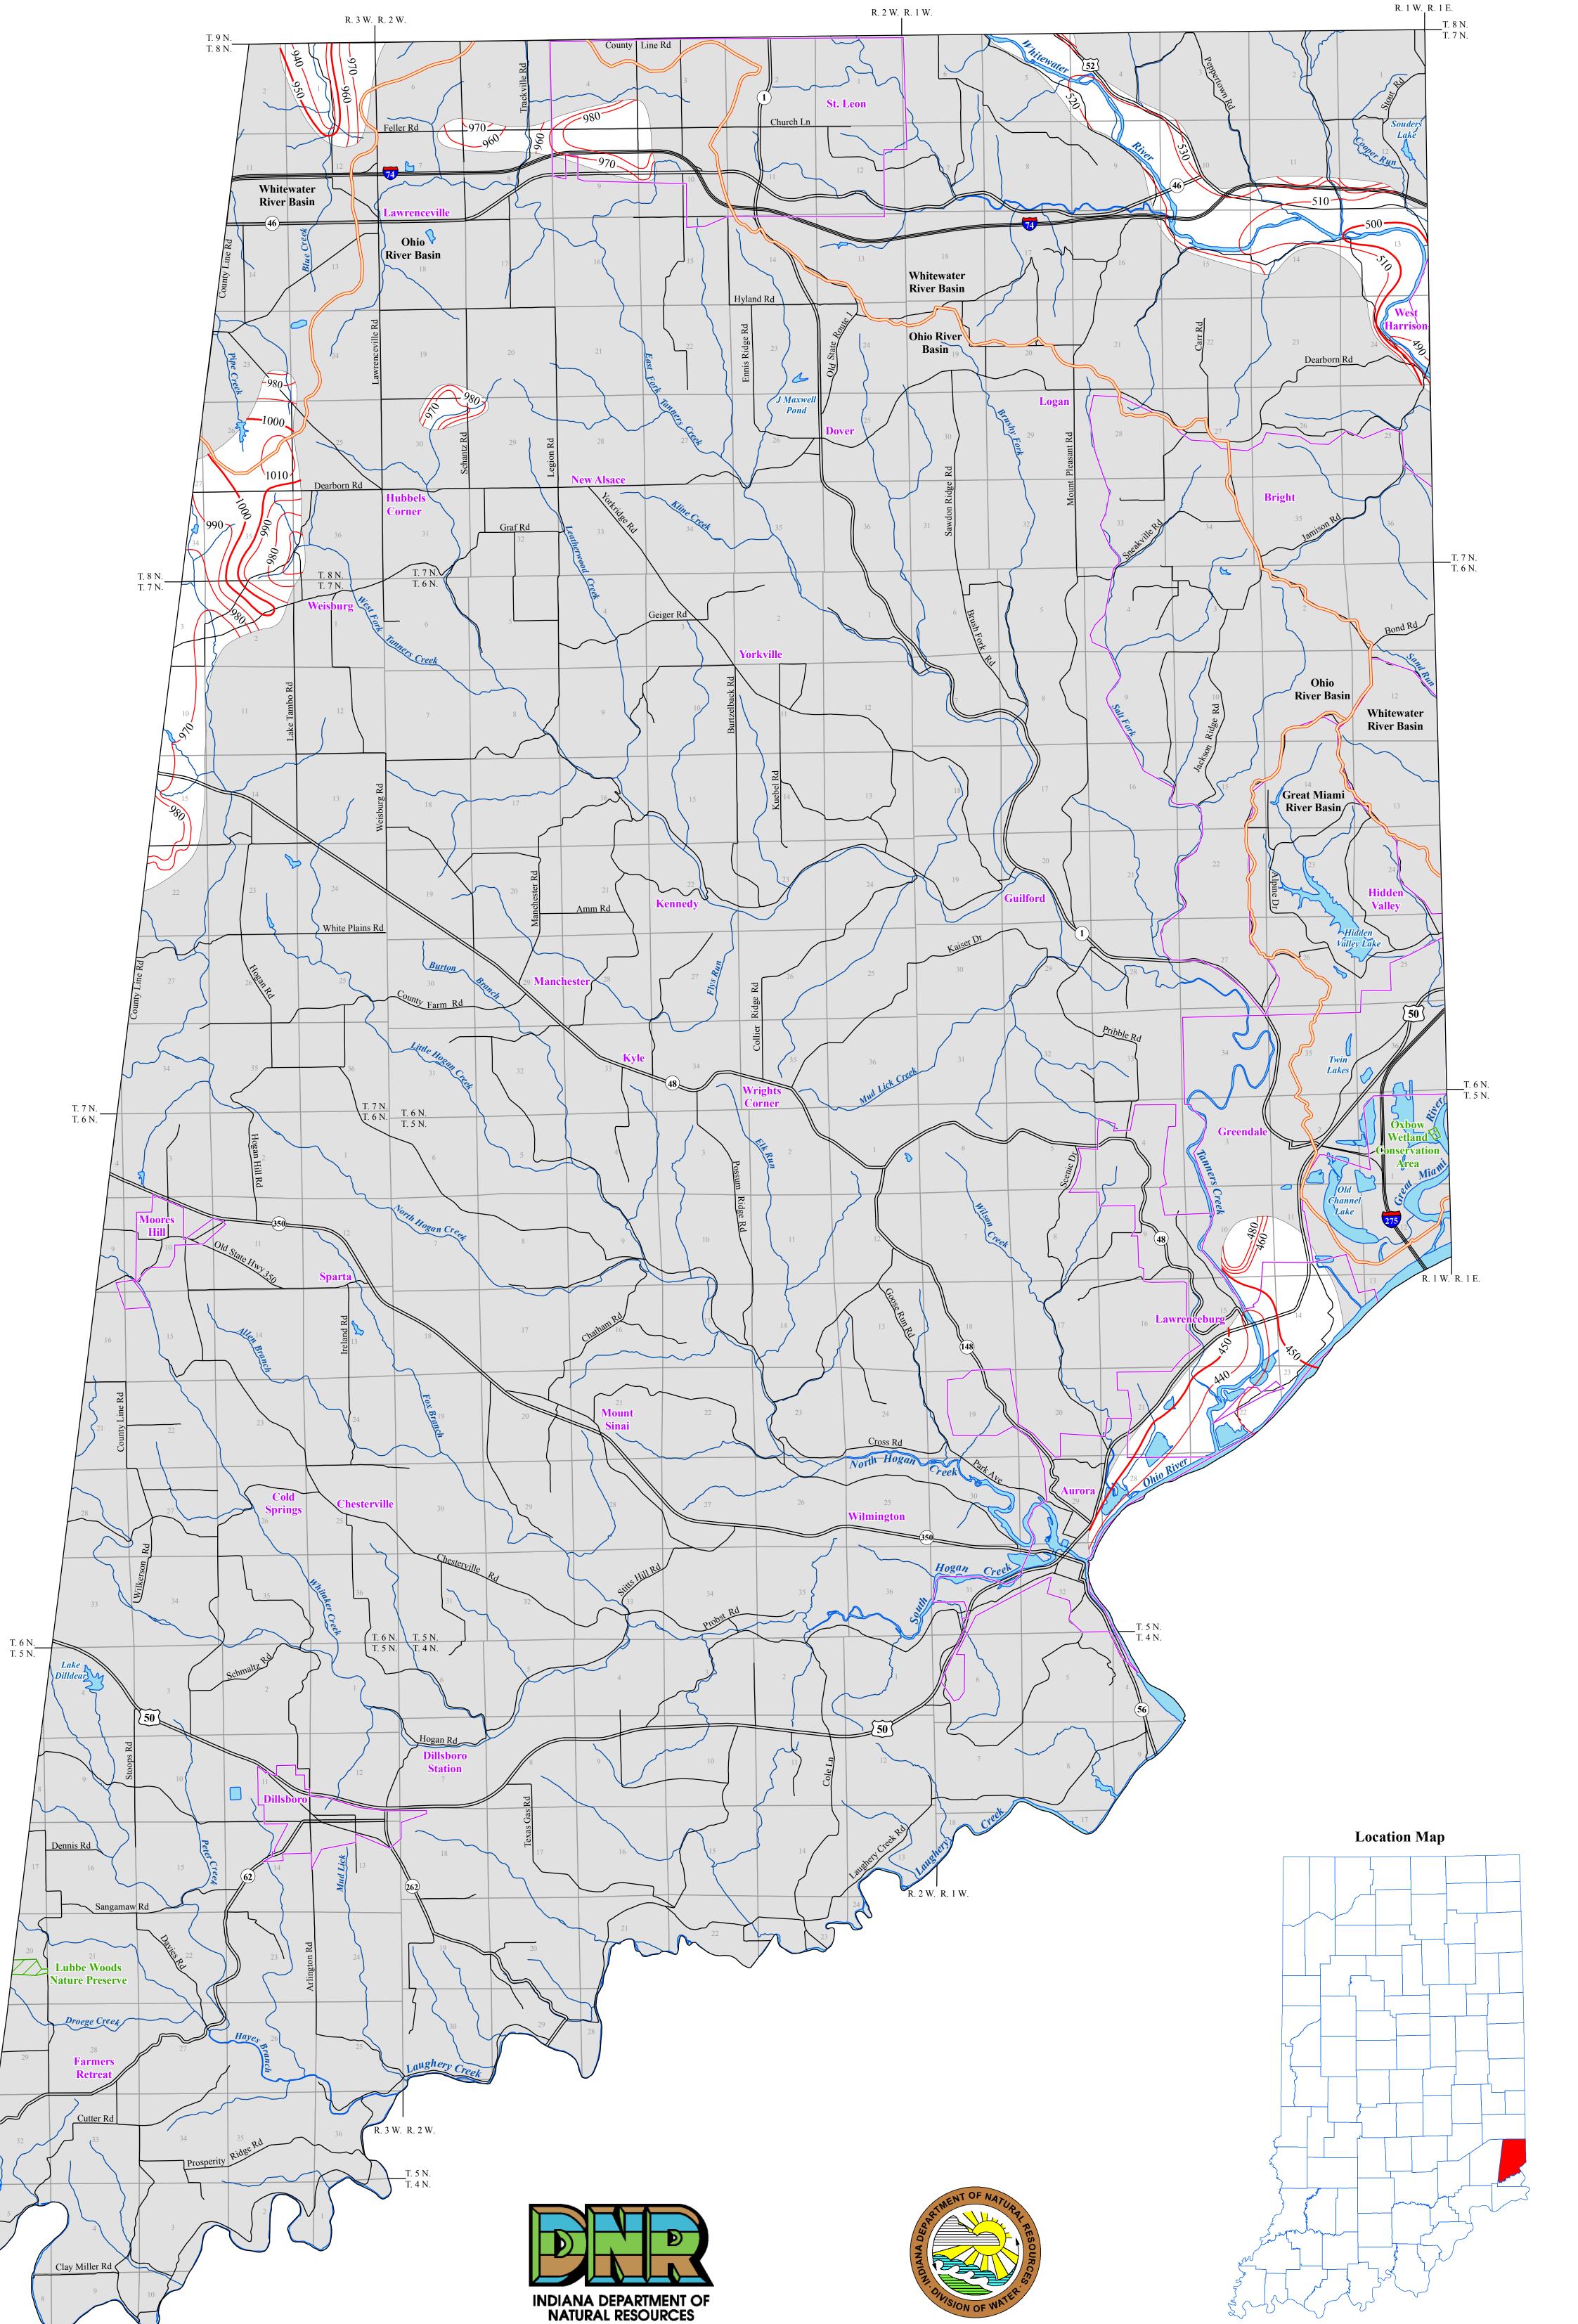

Dearborn County is located in the southeastern portion of Indiana, and is bounded by the counties of Franklin, Ohio, and Ripley to the north, south, and west, respectively. The state of Ohio borders the county to the east, and the state of Kentucky borders the county to the southeast. Nearly the entire county lies within the Ohio River Basin with small portions in the northwest, northeast, and east within the Whitewater River Basin and a small area in the southeast within the Great Miami River Basin.

The potentiometric surface is a measure of the pressure on water in a water bearing formation. Water in an unconfined aquifer is at atmospheric pressure and will not rise in a well above the top of the aquifer, in contrast to groundwater in a confined aquifer which is under hydrostatic pressure and will rise in a well above the top of the water bearing formation.

The Potentiometric Surface Map (PSM) of the unconsolidated aquifers of Dearborn County is mapped by contouring the elevations of 143 static water-levels reported on well records received primarily over a 50 year period. These wells are completed in aquifers at various depths, and typically, under confined conditions (bounded by impermeable layers above and below the water bearing formation). However, some wells are completed under unconfined (not bounded by impermeable layers) settings. The mapped potentiometric surface contours are primarily for the upper 100 feet of the unconsolidated materials and utilize data for wells 100 feet or less in depth.

For most of Dearborn County, unconsolidated and bedrock aquifers are very limited groundwater resources. According to the Unconsolidated Aquifer Systems of Dearborn County map produced by Indiana Department of Natural Resources, Division of Water, Dissected Till and Residuum Aquifer System covers 92 percent of Dearborn County. It can be characterized by thin till deposits with very thin layers of sand and gravel, or thin, eroded bedrock deposits. There are few reported wells in the county utilizing this aquifer system. The mapped potentiometric contours shown are predominately located in areas with sand and gravel material of the Whitewater and Ohio River Outwash Systems, which are more suitable aquifer systems to meet the needs of domestic and high-capacity users.


Static water-level measurements in individual wells used to construct county PSM's are indicative of the water-level at the time of well completion. The groundwater level within an aquifer constantly fluctuates in response to rainfall, evapotranspiration, groundwater movement and pumpage. Therefore, measured static water-levels in an area may differ due to local or seasonal variations. Because fluctuations in groundwater are typically small, static water-levels can be used to construct a generalized PSM. As a general rule, but certainly not always, groundwater flow approximates the overlying topography and intersects the land surface at major streams

Universal Transverse Mercator (UTM) coordinates for the water wells were either physically obtained in the field, determined through address geocoding, or reported on water well records. The location of the majority of the water well records used to make the PSM were field verified. Elevation data were obtained from a digital elevation model. Quality control/quality assurance procedures were utilized to refine or remove data where errors were readily apparent.


Potentiometric surface elevations range from a high of 1010 feet mean sea level (msl) in the western portion of the county, to a low of 440 feet msl in the southeast portion of the county near the Ohio River. Regional groundwater flow direction is generally to the southeast towards the Ohio River or east towards the Whitewater River. Localized groundwater flow is towards their tributaries.


The county PSM can be used to define the regional groundwater flow path and to identify significant areas of groundwater recharge and discharge. County PSM's represent overall regional characteristics and are not intended to be a substitute for site-specific studies.

## Digital Elevation Map of Dearborn County, Indiana

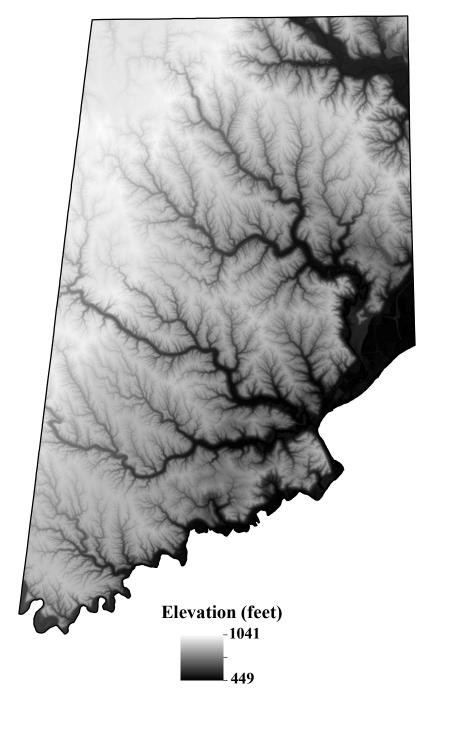


## **EXPLANATION**

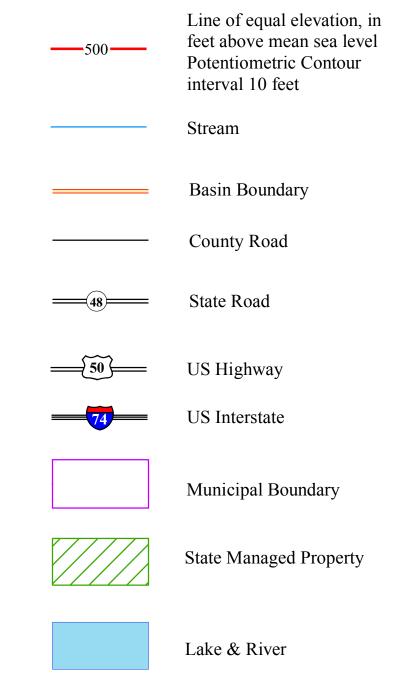

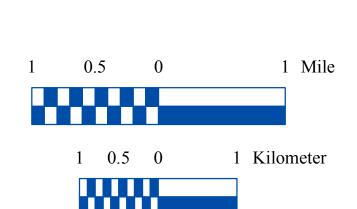

No Aquifer Material

or Limited Data



## Map Use and Disclaimer Statement

We request that the following agency be acknowledged in products derived from this map: Indiana Department of Natural Resources, Division of Water.

This map was compiled by staff of the Indiana Department of Natural Resources, Division of Water using data believed to be reasonably accurate. However, a degree of error is inherent in all maps. This product is distributed "as is" without warranties of any kind, either expressed or implied. This map is intended for use only at the published scale.

This map is created from several existing shapefiles. Township and Range Lines of Indiana (line shapefile, 20020621), Land Survey Lines of Indiana (polygon shapefile, 20020621), and County Boundaries of Indiana (polygon shapefile, 20020621) are all from the Indiana Geological Survey and based on a 1:24,000 scale. Roads (TIGER and INDOT) (line shapefile, 2005) is from the Indiana Department of Transportation and based on am1:100,000 scale. System1 (line shapefile, 2003) is from the Indiana Department of Transportation and based on a 1:24,000 scale. Incorporated Boundaries in Indiana (polygon shapefile, 20060501) is from the Graphics and Engineering Section, Indiana Department of Transportation. Hydrography, Streams (NHD) (line shapefile, 20081218), Rivers (NHD) (polygon shapefile, 20081218), and Lakes (NHD) (polygon shapefile, 20081218) are from the U.S. Geological Survey and based on a 1:24,000 scale. Basin boundaries are modified from the Watershed Boundary Dataset (polygon shapefile, 2008) developed by the Natural Conservation Service and based on a 1:24,000 scale. Managed Lands IDNR IN (polygon shapefile, 20100920) is from the Indiana Department of Natural Resources and based on a 1:24,000 scale. The Digital Elevation Map image is derived from the Indiana Ortho/LiDAR Statewide Collection Program (2013). Dearborn County Unconsolidated No Aquifer Material or Limited Data (polygon shapefile, Cox, 2017) and Potentiometric Surface Contours of the Unconsolidated Aquifers of Dearborn County, Indiana (line shapefile, Cox, 2017) are based on a 1:24,000 scale.

Potentiometric Surface Map of the Unconsolidated Aquifers of Dearborn County, Indiana

by
Kristiana E. Cox
Division of Water, Resource Assessment Section

November 2017

T. 5 N. T. 4 N.